

Foxfab Disconnects

FFDS-F1 Series



The FFDS-F1 Series Fused Disconnects allow safe load make/break operation. Assemblies are available with up to 800A mains and are ETL-certified.

Standard Features/Specifications

- Weatherproof Type 3R Enclosure
- Steel Construction with ANSI 61 Grey Powder Coat Finish
- Wall-Mount or Free-Standing Design
- Hinged Single Door with Gaskets and Pad-Lockable Handle
- Fused Disconnect
- Mechanical Line and Load Lugs
- Three Phase - 120/208/480/600VAC
- ETL Certified Assembly

Options

- Type 1, 4, or 4X Enclosure
- Aluminum or Stainless Steel Construction
- Custom Powder Coat Finishes
- Auxiliary Contacts
- Single Phase, 120/240VAC


Rev 0.1

Foxfab Disconnects


FFDS-F1 Series



Panel Layouts

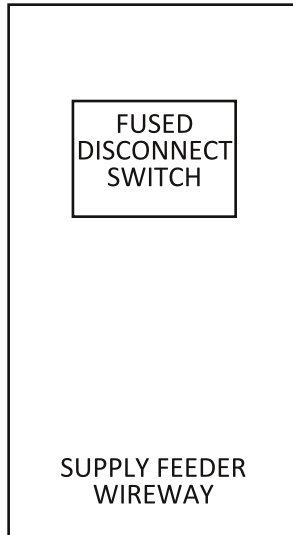

One-Line Diagram

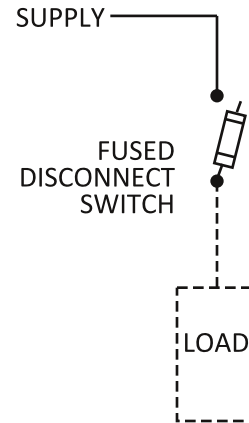

Typical Configurations

PART NO.	PHASE	AMP	VOLTAGE	H (")	W (")	D (")
FFDS-F1-1P0030A	1	30	120/240	10	8	6
FFDS-F1-1P0060A	1	60	120/240	12	10	6
FFDS-F1-1P0100A	1	100	120/240	24	10	6
FFDS-F1-1P0200A	1	200	120/240	30	16	8
FFDS-F1-1P0400A	1	400	120/240	48	24	10
FFDS-F1-1P0600A	1	600	120/240	60	30	12
FFDS-F1-1P0800A	1	800	120/240	72	30	12
FFDS-F1-3P0030A	3	30	120/208/480/600	10	8	6
FFDS-F1-3P0060A	3	60	120/208/480/600	12	10	6
FFDS-F1-3P0100A	3	100	120/208/480/600	24	10	6
FFDS-F1-3P0200A	3	200	120/208/480/600	30	16	8
FFDS-F1-3P0400A	3	400	120/208/480/600	48	24	10
FFDS-F1-3P0600A	3	600	120/208/480/600	60	30	12
FFDS-F1-3P0800A	3	800	120/208/480/600	72	30	12